



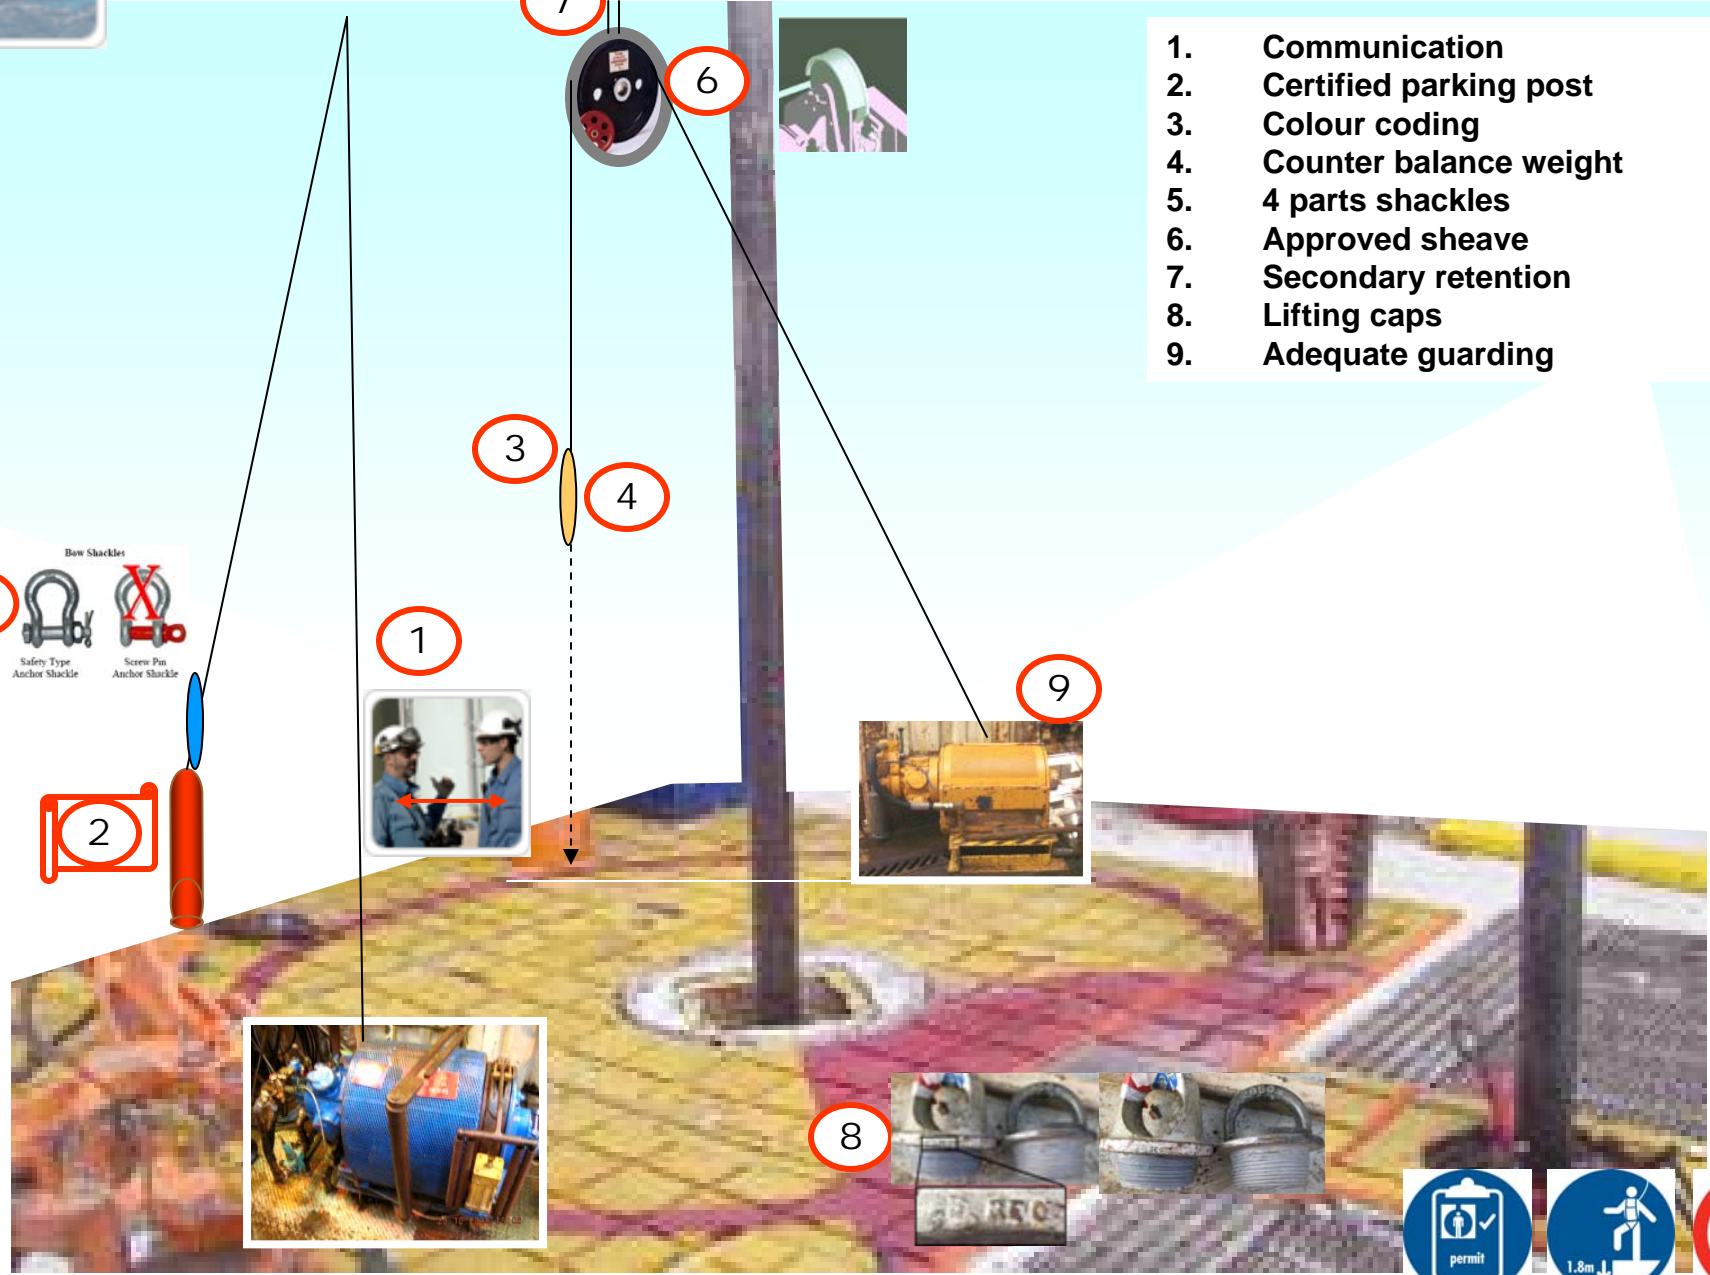

Lifting on the rig floor

1. Communication
2. Certified parking post
3. Colour coding
4. Counter balance weight
5. 4 parts shackles
6. Approved sheave
7. Secondary retention
8. Lifting caps
9. Adequate guarding



Target Areas

- Communication / Behaviours
 - Two way communication
 - Winch operation
- Colour Coding
 - Ferrule end of winch
- Certified Parking Post
 - Should be rated to SWL of the tugger.
 - Alternative is a soft link / Mr Snubby
- Counterbalance Weight
 - Procedures
- 4 Part Shackles
 - Eliminate use of hooks on drill floor
 - DROPS reliable securing recommends “use shackles with double locking, eg. nut & split pin or screwed connection & split pin.”